

Swing Door Operator EMSW



The most versatile and reliable swing door operator

The AAA EMSW is an electro-hydraulic operator designed for a wide variety of applications. It is suitable for almost all types of external and internal swing doors. The operator can be mounted on either side of the door for pull or push action and is suitable for single or double doors fitted with butt hinges or pivots.

For any retrofit, the EMSW can be taken from the box and be operational in minutes. With little training, your technical staff can administrate it and your choice of door supplier can install it.

Reliability is a strong characteristic for EMSW, the engineering know-how behind the operator has allowed it to not only be fitted everywhere but also be functional under a wide variety of conditions.

The EMSW is just as suitable for disabled access, nursing homes and hospital corridors – where the requirements are for flexible operation and reliability – as it is for department stores, banks, hotels etc. with high density traffic and difficult operating conditions.

World-class safety with fire door approval

The EMSW offers a high degree of safety. The operator can be combined with the full range of AAA safety units. The door is then prevented from opening or closing on users or other obstructions. It has received certification for fire door approval from Swedish and German authorities. In the event of a power failure, the EMSW works as a door closer.

Easy installation for demanding environments

Installing the unit is easy and AAA offers regular training to all resellers to ensure high quality installations. High-use and demanding environments, like a school or an emergency entrance at a hospital, can both benefit from the EMSW. Its sturdy design holds up to rough treatment.

Strength

The EMSW is one of the most powerful door operators in the market, handling door leaves up to 250Kg with 1600mm width.





advanced
automated
access





Unit 5,
Farm Estate
Brentwood Road,
Herongate, Brentwood
Essex CM13 3LH
t: 0844 736 61 60
f: 0844 736 61 59
e: info@aaaauk.co.uk
w: www.aaaauk.co.uk

Pushing arm system, PUSH

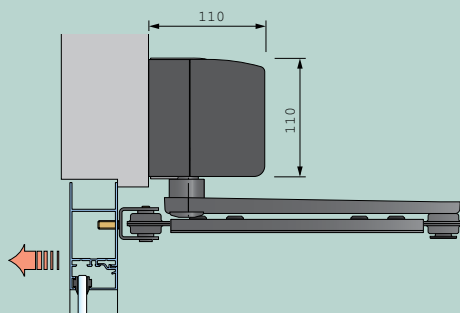

Pulling arm system, PULL



Design

The compact AAA EMSW is supplied for different doors and customer requirements. The operator works electro-hydraulically. It opens with motor and closes with spring. The opening and closing speeds can be varied individually. The motor, oil pump and hydraulic unit are combined into a compact unit mounted next to the control unit within the cover.

The operator is connected to the door leaf with either a pushing or a pulling arm system.

Models

- EMSW – for single doors – one drive unit and one control unit fitted under a standard length cover.
- EMSW-Special – for single doors – one drive unit and one control unit fitted under a cover with optional length.
- EMSW-2 – for double doors – two drive units with control unit and slave control unit fitted under a cover with optional length for parallel operation of two doors.

Arm systems

- PUSH – Pushing arm system, used for fire approved doors where the operator is installed on the wall on the opposite side of the door swing. Door opening angle adjustable up to 120°.
- PULL – Pulling arm system where the operator is installed on the wall on the same side as the door swing. Door opening angle adjustable up to 120°.
- Shaft extensions – Allow the operator to be fitted higher on the wall or the arm lower on the door leaf.

Fire doors

The EMSW offers fire rating and is approved for fire door installations by the German and Swedish authorities.

Standard equipment

- Cover in clear anodized aluminum.
- Control unit – with possibility to connect manual and automatic activation units, programme selector PS-3 and electric striking plates.
- Telescopic extension arm
- Shaft extension
- Black SAS-F PUSH/PULL arm system

Accessories

- Coordination unit COOA which ensures that rebated doors close in correct order.
- AAA's range of manual and automatic activation units.
- Impulse and presence detection sensors.
- Arm stop.

Technical data

- Power supply: 230 V AC, 50 Hz
- Weight of operator 11.5 kg
- Auxiliary voltage: 24 V DC
- Power consumption: max. 230 W
- Ambient temperature: -15° to +30°C
- Recommended max. door weight: 250 kg for door leaf width 1600 mm

Authority Approval

The EMSW meets requirements for door weights/widths stated in the:

- Controlled door closing, EN 1154 size 3-6
- Electrically powered hold open device for swing doors, EN 1155
- Coordination unit for rebated doors, EN 1158
- Door closer with opening device (Swing door operator), DIN 18263-4 AU Size 3-6
- ANSI/BHMA A156.10, A156.19
- UL325/CUL325

